


- NAP-CTO FDB0216F




Technical Parameter

| | | | |
|---------------------|--|-------------------------|---|
| Model | FDB 0216F | Adapter quantity | 24pcs SC simplex |
| Material | Modified polymer plastic | Color | Black |
| Dimension | 385*245*130 mm | PLC Splitter | 1x 1*16 (PLC); 2x (1*8 (PLC) steel tube |
| Cable entry | 1mid span, 2 cable glands | Net weight | 4.2kgs |
| Cable exit | 16 drop cable | Waterproof grade | IP68, ROHS |
| Max capacity | 48 fibers (4 trays, 12 fibers/tray) | Cable diameter | 1:10-17.5mm, 2:8-17.5mm, 16:2*3mm, 2*5mm 7mm |

Product Detail

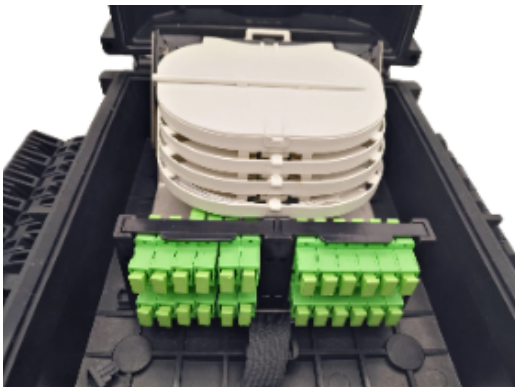

Splice tray: 4pcs 12 fiber tray, total 48 cores fusion

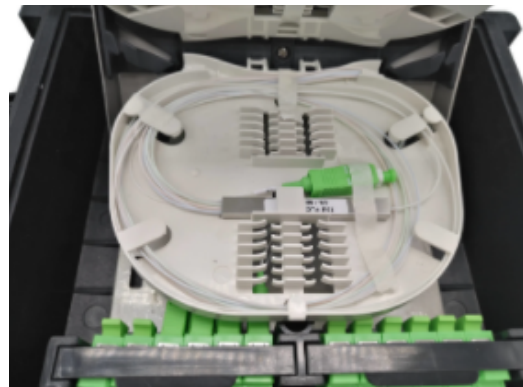

Splitter tray: each tray have 1x8 splitter tube fix slot in the middle



Adapter panel: 24SC simplex holder in 4 groups, each 6SC



Metal Sheet: Cable entry fix plate, big size, stainless steel with cable clamps in accessory bag.


Product Detail



Cable Port: 1 mid span, 2 cable glands. 16 drop cable ports



Lock System: 4 brackets at both sides, 2 screw rods at both side

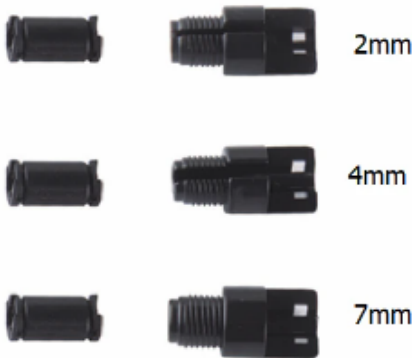

Drop cable grommets: 2mm, 4mm, 7mm drop cable fixture can be optional



Accessory bag: cable clamps, mounting screws, rubber seal, insulation tape, wrench, heat shrink protection sleeve 60mm, nylon tie, buffer tube, etc





Description

FDB0216F outdoor fiber optic distribution box is a high density solution for FTTH next generation networks, it provide and manage maximum 48 cores fiber termination in a limited space. It can be outdoor wall mount, pole mount, aerial mount with IP68 waterproof grade.

Features

- Box is total enclosed with screw rod + 4 brackets.
- High quality PP+GF plastic, with strength strips on lid or bottom.
- Anti-UV, Ultra violet and rainfall resistant, protection class IP68.
- Dis-mountable adapter panel max. 24SC, 5trays max. fusion 96cores.
- Cable clamp and fixture for entry and exit, and large redundant fiber storage space, reasonable bend radius.
- Support mid span termination, easy operation and installation.